



AMPX 40A (5-14S) Drone ESC W/box Electronic Speed Controller

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: GS
- Model Number: AMPX 40A (5-14S)
- Price: Negotiable




Product Specification

- Model: AMPX 40A ESC HV
- Compatible Signal Frequency: 50-500HZ
- PWM Input Signal Voltage: 3.3V/5V (compatible)
- Power Wire / Wire Length: 16AWG/380mm
- Supported Lithium Cell Count: 5~14S
- Dimensions (L*W*H): 62.2.*31.0*16.0mm
- Protection Level: IPX4
- Operating Environment Temperature: (-20~65°C)
- Current Limit: 48A
- Signal Wire Length: 420 Mm
- Motor Wire / Wire Length: 16AWG/80 Mm
- Highlight: 22000mAh UAV drone battery ,
22000mAh rechargeable drone battery ,
6S UAV drone battery



More Images



Product Description

AMPX 40A (5-14S) Drone ESC W/box Electronic Speed Controller


- 1.Supports 5-14S, 16V -64V.
- 2.Recommend to buy V2.0 with CAN version.
- 3.V2.0 feature: Dual throttle control:RPM+CAN
Firmware upgradeable
BEC output: 5V/200 mA
Overload protection: unlimited automatic restart
Communicate with flight control in real time by CAN: voltage, current, temperature, operation status.

Features

- Quick response. it will take only 0.25 seconds from starting motor to full speed running.
- Good compatibility and stability with special control algorithm for disc motors.
- Synchronous freewheeling technology can bring beter throttle linearity, driving efficiency and automatic energy recovery when lowering motor speed.

AMPX 40Av2 5~14SHV

MULTI PROTECTION=MORE SECURITY

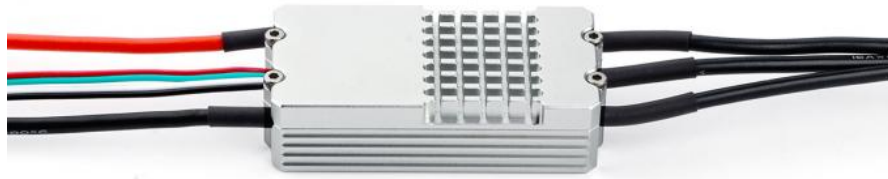

CONTINUOUS CURRENT 40A CURRENT LIMIT 48A PROTECTION LEVEL IPX4 SUPPORTED LITHIUM CELL COUNT 5~14S

Features

- Quick response. It will take only 0.25 seconds from starting motor to full speed running.
- Good compatibility and stability with special control algorithm for disc motors.
- Synchronous freewheeling technology can bring better throttle linearity, driving efficiency and automatic energy recovery when lowering motor speed.
- With CAN communication interface, can be real-time communication with flight control. (Note: This function should be matched with flight control)

Protection Function

Short Circuit Protection

When the ESC checks to trigger the short-circuit protection, the ESC shuts down the output. 100ms later the ESC automatically restores to restart.

Stall Protection

If the ESC detects a motor stall, triggering stall protection, the throttle must be returned to zero and then advanced again to restore normal operation.

Voltage Protection

Upon power-up, if the ESC detects battery voltage below 16V or above 64V, it will emit an alarm sound and not start the motor. This protection is disabled during flight.

Temperature Protection

During flight, if the temperature of the ESC is higher than 125°C, it will generate a fault signal and start reducing the output power to 50% of the maximum value. If the temperature continues to rise to 140°C, the ESC will turn off the output, and the normal output will not be restored until the throttle setting is reset to zero. When the temperature drops to 80°C, the maximum output power of the esc starts to rise.

Throttle Loss Protection

If the ESC detects a loss of throttle signal for more than 2 seconds, it will cut power. Power will be restored to the previous level once the signal is regained.


Startup Protection

If the motor is not started within 10 seconds after increasing the throttle, the ESC will shut down the output. Normal operation can be restored by returning the throttle to zero and then advancing it again.


Throttle Calibration Setting

Connect the motor first, push the throttle to the maximum, then power up. After hearing two "bi bi" sounds, pull the throttle to the minimum. When you hear a "DO MI SO" sound, it indicates that the throttle range setting is successful.

ESC Connection

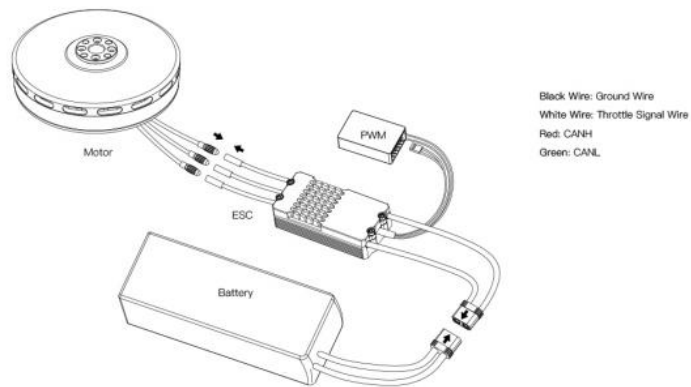

ESC Parameter			
Model	AMPX 40A ESC HV	Supported Lithium Cell Count	5-14S
BEC	None	Throttle Pulse Width	Default 1050us-1940us, supports throttle calibration
Compatible Signal Frequency	50-500Hz	Dimensions (L*W*H)	62.2*31.0*16.0mm
PWM Input Signal Voltage	3.3V/5V (compatible)	Protection Level	IPX4
Online Update	Supported	Phase Short Circuit Protection	Supported
Throttle Loss Protection	Supported	CAN communication	Supported
Error Signal Output	Not Supported	Weight (excluding wires)	Approximately 60g
Voltage Protection	Supported	Operating Environment Temperature	(-20~65°C)
Motor stall protection	Supported	Continuous Current	40A (Requires good heat dissipation conditions)
RPM Signal Output	Not Supported	Current Limit	48A
Temperature Detection	Not Supported	Signal Wire Length	420 mm
Power Wire / Wire Length	16AWG / 380mm	Motor Wire / Wire Length	16AWG / 80 mm

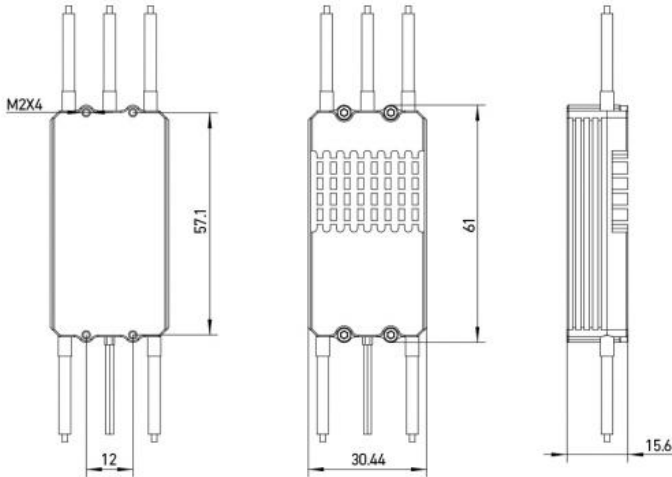ESC Dimension			
 <p>The image contains three technical drawings of the ESC. The left drawing is a top view showing a rectangular shape with four mounting holes labeled 'M2X4' at the corners. The width is dimensioned as 12 mm. The right drawing is a front view showing the same rectangular shape with a height dimension of 57.1 mm and a width dimension of 30.44 mm. The rightmost drawing is a side view showing the thickness of the unit, dimensioned as 15.6 mm.</p>			

Trouble Shooting			
Problem	Alarm	Cause	Solution
Motor can't start after powering on.	Quick noise of beep beep beep...	Throttle is not made zero.	Adjust throttle stroke to bottom
Motor can't start after powering on.	Beep, beep, beep... every 1 second.	Receiver has not throttle output signal.	Check sender and receiver co-work condition, check throttle control lines
Voltage is less than 16V.	Beep beep, beep beep... every 1 second.	Battery voltage is too low.	Change full power battery.
Voltage is more than 64V.	Beep beep, beep beep... every 1 second.	Battery voltage is too high	Change proper full power battery.
Temperature is higher than 125 centigrade degree.	Beep beep beep, beep beep beep ... every 1 second.	ESC temperature is too high.	Please cool down the ESC in a ventilated place
The power-on current or short-circuit protection is abnormal	Beep beep beep beep, beep beep beep beep... every 1 second.	Overload	Replace the propeller with appropriate one

Disclaimer
<p>Thank you for choosing this product. Please carefully read this manual before using this product. Using this product will indicate you're agreed with the all items in this manual. Please strictly follow these items during usage. We'll not commit any responsibility including but not limited to indirect loss or joint responsibility caused by improper usage, private modification and other faults. The maximum compensation will be not more than the cost of product itself.</p>

Attention
<p>Please follow local laws and regulations to legally use this product in flight, and be sure to stay away from people, high-tension lines, and public places.</p> <p>This product has strong power and high speed propeller operation with certain safety risks. Users must older than 18 years old and have relevant professional knowledge.</p> <p>Do not get close to the motor or propeller that rotates at high speed to avoid being cut.</p> <p>Before flight, please carefully check that all parts are in good condition, propeller and motor are installed correctly, and screws are not loose.</p>

Our Services

1. We provide 1 Year Warranty. Buy with confidence.
2. If you are not satisfied when you receive your item, please return it within 14 days for a replacement or money back. Please contact me before you return it.
3. If item is defective in 3 months, We will send you a replacement without extra charger, or offer refund after we receive the defective item.
4. If item is defective after 3 months, you can still send it back to us. We will send you a new one after receiving the defective item. But you have to pay the extra shipping fee.



FAQ

Q1: Do you support OEM/ODM?

A1: Yes. We can print your logo on the product.

Q2: About samples.

A2: Under normal circumstances, samples will be ready within 7 days, and 10-20 days for OEM/ODM orders. Sample fee and shipping will be charged.

Q3: What is the delivery time?

A3: For regular orders, we can ship within 15 days, for OEM/ODM, we can ship within 25-45 days (depending on the quantity). In the event of delays, we will notify you in advance of the status and resolution.

Q4: What is the minimum order quantity?

A4: There is no MOQ for wholesale (1 piece accepted), including OEM/ODM.

Q5: What are your payment terms?

A5: L/C.TT100%.

Q6: Can you reduce the shipping cost?

A6: When calculating the shipping cost for you, we always choose the cheapest and safest express. Although we have partnerships with shipping companies, we can't keep costs down because it's not us who get paid. If you think it's expensive for you. You can always make your own choice.

Q7: Return policy.

A7: If you want to replace the received item, you must contact us within 7 days after receiving the item. Returned items should be in their original condition and you should pay for additional shipping.



Guangzhou Gesai Intelligent Electronic Technology Co., Ltd.



Kellyyangjing2021@outlook.com



uav-vtoldrone.com

Fuli Yingtong Building, the Pearl River New Town, Tianhe District, Guangzhou, Guangdong, China