Made in China

30x Optical Zoom + 3-Axis Stabilization 4K Resolution Network IP Gimbal

Basic Information

- Place of Origin:
- GS • Brand Name: KIP30S4K Model Number:
- Minimum Order Quantity:
- 1 • Price: Negotiable
- Delivery Time: 6-8
- T/T• Payment Terms:
- Supply Ability: 100



Product Specification

• Voltage:	DC12V-26.2V
Power Supply:	Dynamic 10W
Roll Angle:	-85° +85°
Pitch Angle:	-45° +135°
• Yaw Angle:	360 Degree Continue
• Pitch And Roll Jitter Angle:	±0.02°
 Horizontal Jitter Angle: 	±0.03°

4K 30 Fps /1080P 30fps

- ous Rotation
- Support Mode:



30x Optical Zoom + 3-Axis Stabilization 4K Resolution Network IP Gimbal

KIP30S4K is a 4K resolution gimbal which integrated 210x Mixed zoom^① and 3-axis stabilization. It is 4K IP output gimbal. The ground receiving end outputs RTSP code stream, and the ground sending end software App supports PTZ control and zoom camera control. The PTZ adopts high-precision encoder FOC control scheme, which has the characteristics of high stability, small volume, light weight and low power consumption. The camera adopts 8MP HD sensor. Support 4K, 1080p local TF storage and wireless transmission.

30x zoom and TF card storage	Multiple control modes
4K solution, IP output	Imaging & control with the same IP
3-Axis, Follow/Lock mode	Ground software display & control

an an an an gar	Voltage	DC12V-26.2V
	Power Supply	Dynamic 10W
1000	Roll Angle	-85° \sim +85°
	Pitch Angle	-45 $^\circ~\sim~+135^\circ$
	Yaw Angle	360 Degree continuous rotation
Gimbal Feature	Pitch and Roll Jitter Angle	±0.02°
	Horizontal Jitter Angle	±0.03°
reature	One-Click Restore	One-click restore to the initial position
		Low speed at big zoom status and fast speed control at small
	Adjustable Gimbal Speed	zoom status. Adaptive speed control based on zooming of
		daylight sensor.
Sec. 1	SENSOR	1/2.8 Inch 8MP CMOS SENSOR
	Optical Zoom	30x HD optical zoom lens, f=4.5±10%~135±10%mm
	AF Time	Real time fast focusing, focusing time < 1s
Visible	Video Output	RTSP code stream, IP network output 4K resolution, 1080P
light		video stream
Camera	Local Record	Local TF storage, H.264, 4K, 1080P, video stream
Para	Para Field Angle (FOV)	D : WIDE 67.8°±5% TELE 2.77°±5%
		H : WIDE 59.8°±5% TELE 2.34°±5%
		V : WIDE 40.5°±5% TELE 1.48°±5%
	Support Mode	4K 30 fps/1080P 30fps
	Control Mode	IP and serial port
Ground Control Software		Windows and Android Ground control software
Device Size		140mm×162mm×144mm
	Work Condition	-10°C to +55°C / 20% to 80% RH
Storage Condition		-20°C to +60°C / 20% to 95% RH
Weight (Not including dampers)		655±10g

3- Axis stabilized PTZ with built-in shock absorption	
210x mixed Zoom	
4K IP output and storage	
TF card recording & photo	
Provide ground control software, display and control by App	



Our Services

 We provide 1 Year Warranty. Buy with confidence.
 If you are not satisfied when you receive your item, please return it within 14 days for a replacement or money back. Please contact me before you return it.


3. If item is defective in 3 months, We will send you a replacement without extra charger, or offer refund after we receive the defective item.

4. If item is defective after 3 months, you can still send it back to us. We will send you a new one after receiving the defective item. But you have to pay the extra shipping fee.



FAQ

Q1: Do you support OEM/ODM? A1: Yes. We can print your logo on the product. Q2: About samples.

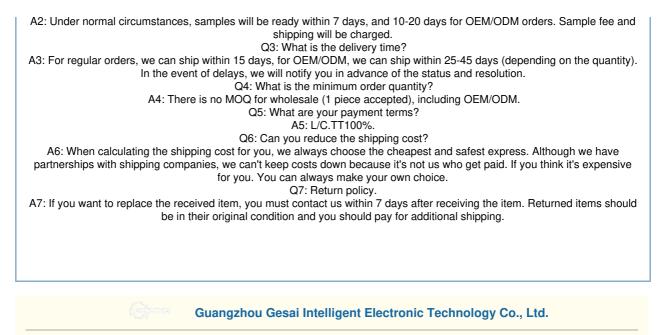



0

Fuli Yingtong Building, the Pearl River New Town, Tianhe District, Guangzhou, Guangdong, China